


Ground method

Methode	Screw (NC)
floate earth potential	closed
reference earth potential	open

N xxx X xx


- Type:  
N = Current sensor
- Nominal current:  
006 = 60A  
030 = 300A  
060 = 600A  
100 = 1000A
- Form factor:  
R = Ring closed  
T = Divisible  
E = Earth sensitive
- Customer
- Quality level:  
C = CI 1  
L = CI 0,5  
M = CI 0,5 & 2,5kHz  
H = CI 0,2 & 10kHz

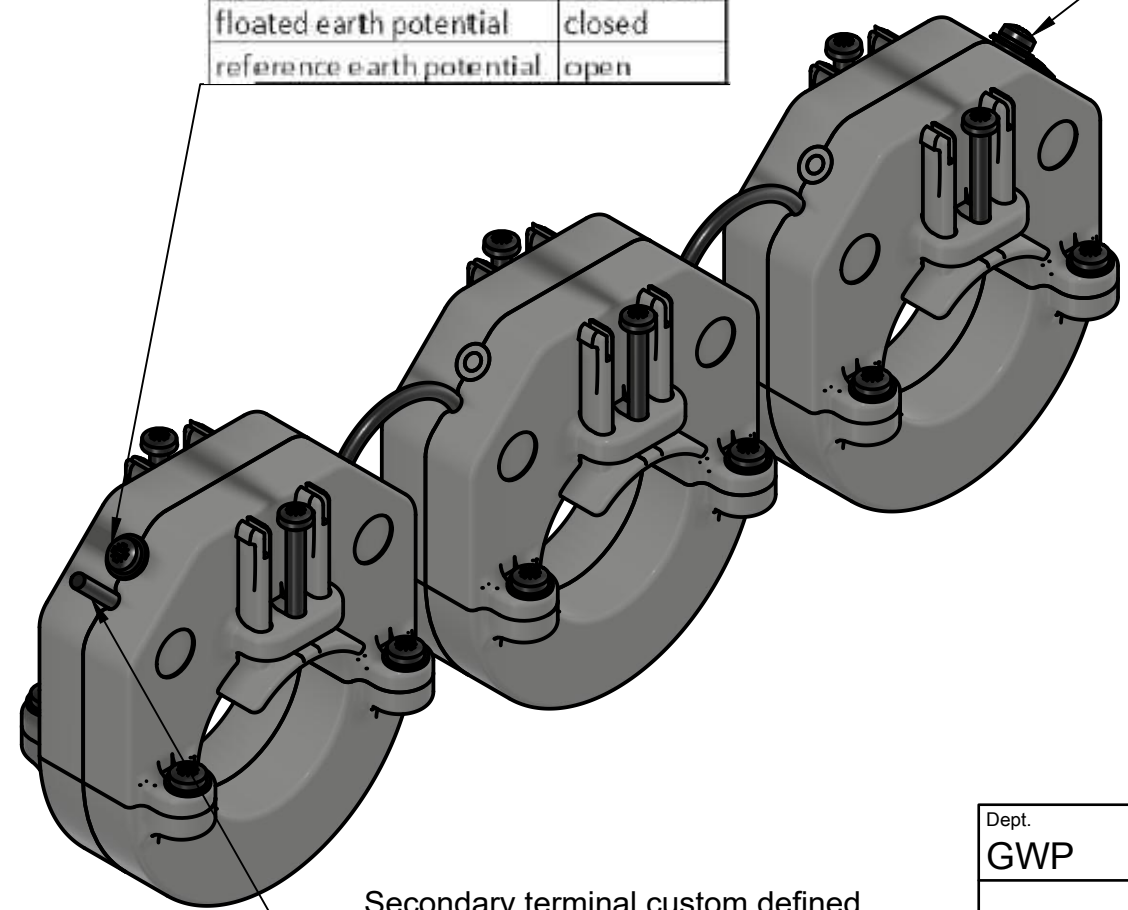

Secondary terminal custom defined  
Recommendation:  
0,5 up to 100m 3pole shielded cable  
open ends with shield - outlet

Standard: IEC 60044-8  
Isolation level: 0,72kV  
Temperature range: -40/80°C  
Accuracy class: 0,5S/0,5/1/3 & max P100  
Ith: 25kA 3sec.

Function principle:

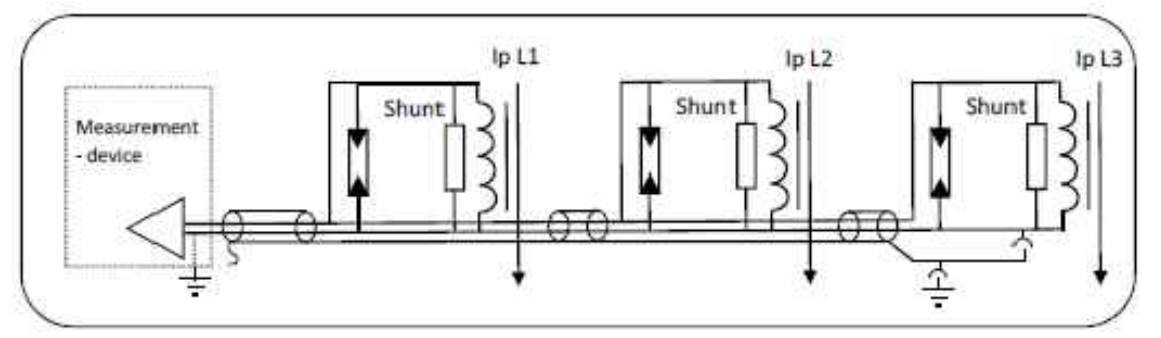

Dept. GWP	Technical reference	Created by W. Bacher 01.08.2017	Approved by N. Juschicz 01.08.2017
	Document type Drawing	Document status	
	Title Indoor Current Sensor Earth sensitive Type	DWG No. NxxxE-xx	
	1:2	Rev. o	Date of issue 01.08.2017