



Standard: IEC 60044-7
 Isolation level: 12/28/75kV 17,5/38/95kV 24/50/125kV
 Temperature range: -40/80°C
 Accuracy class: 0,2/0,5/1/3 & 3P/6P
 Secondary output: 3,25/V3 or customer defined
 Burden: 200kΩ ±1%; max. 1nF ore customer defined
 Bending force on request

Secondary terminal
 custom defined
 Recommendation:
 Shielded cable open
 ends with shield - outlet
 0,5-100m

Function principle:

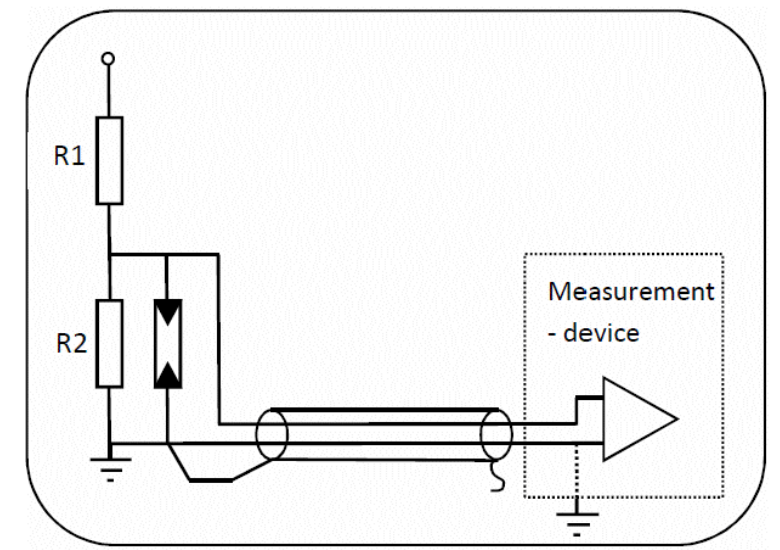

Dept. GWP	Technical reference T240L	Created by W. Bacher 20.09.2018	Approved by N. Juschicz 20.09.2017
 A3/1:2	Document type Drawing	Document status Draft	
	Title Indoor Smartgrid Voltage Sensor Post pone		DWG No. T240L xx
	Rev. 1	Date of issue 20.09.2017	Sheet 1/1