


3 times
NxxxT-xx

Ground terminal
M5


Secondary terminal custom defined
Recommendation:
0,5 up to 100m 3pole shielded cable
open ends with shield - outlet

Ground method

Methode	Screw (NC)
floate earth potential	closed
reference earth potential	open

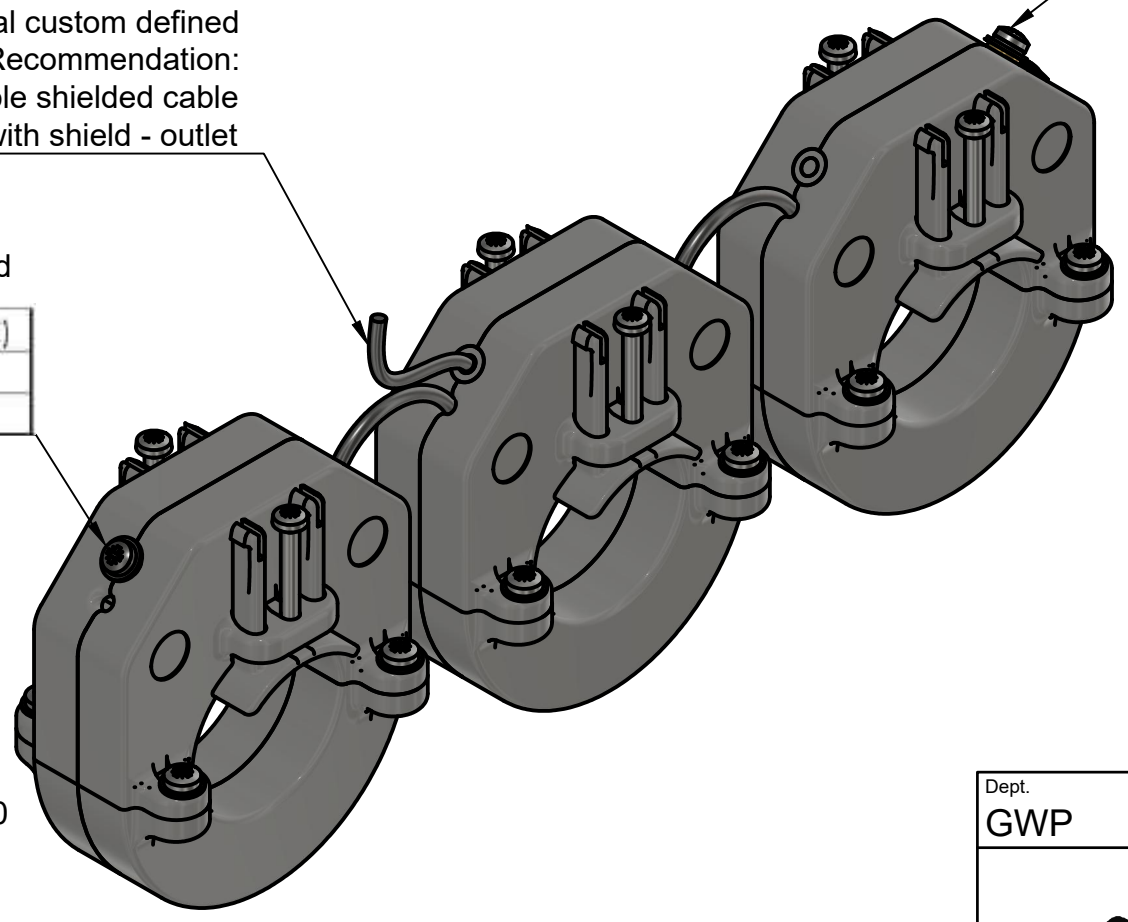

Function principle:

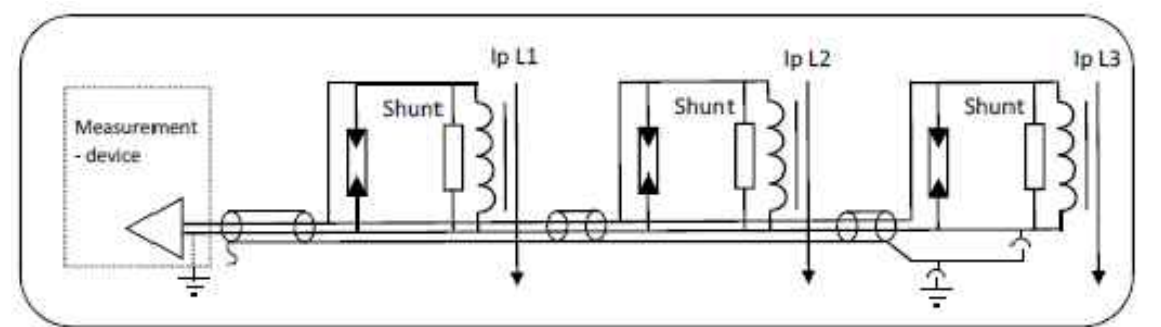

Standard:
IEC 61869-1, IEC 61869-6, IEC 61869-10
Isolation level: 0,72kV/3kV/-
Rated current : 60A
Temperature range: -40/80°C
Accuracy class: 0,5/1/3
Secondary output: 225mV or customer defined
Burden: >20kΩ
Ith: 25kA 3sec.

Dept. GWP	Technical reference	Created by W. Bacher 01.08.2017	Approved by N. Juschicz 01.08.2017
	Document type Drawing	Document status	
	Title Indoor Current Sensor Earth sensitive Type	DWG No. NxxxE-xx	
	1:2	Rev. 1	Date of issue 30.03.2019