



Secondary terminal:  
2m, 2pole shielded cable  
open ends



Function principle:

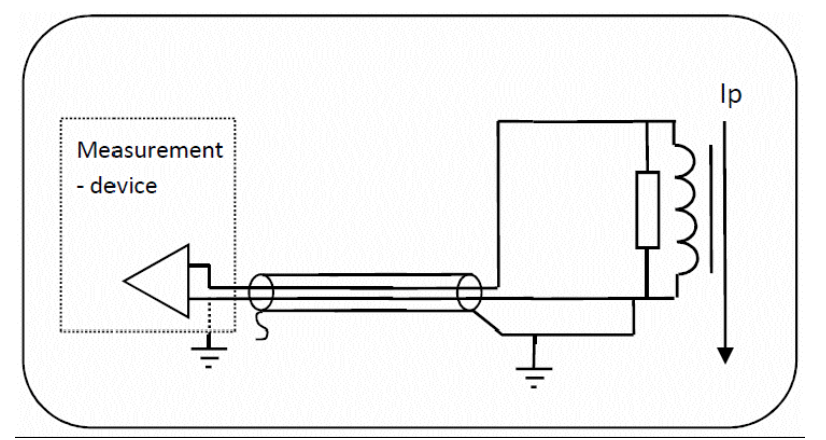

Norm: IEC 61869-10  
 Insulation level: 0,72kV/3kV/-  
 Temperature category: -25/65°C  
 Accuracy class:  
 CI1 initial  
 CI0,5 with std. corr. factor  
 Ratio: 300A//225mV ext.200%  
 lth: 25kA 1sec.

Dept. GWP	Technical reference	Created by W. Bacher 22.10.2018	Approved by N. Juschicz 13.03.2019
 1:1	Document type Drawing	Document status	
	Title Indoor Smartgrid Current Sensor ECO Phase	DWG No. N030T-0U	
		Rev. 1	Date of issue 13.03.2019